NOTE: THIS IS CONFIDENTIAL PROPERTY OF BMC. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES WITHOUT OUR WRITTEN CONTEST.

REV.	DATE	BY	ECN	REMARKS	CK

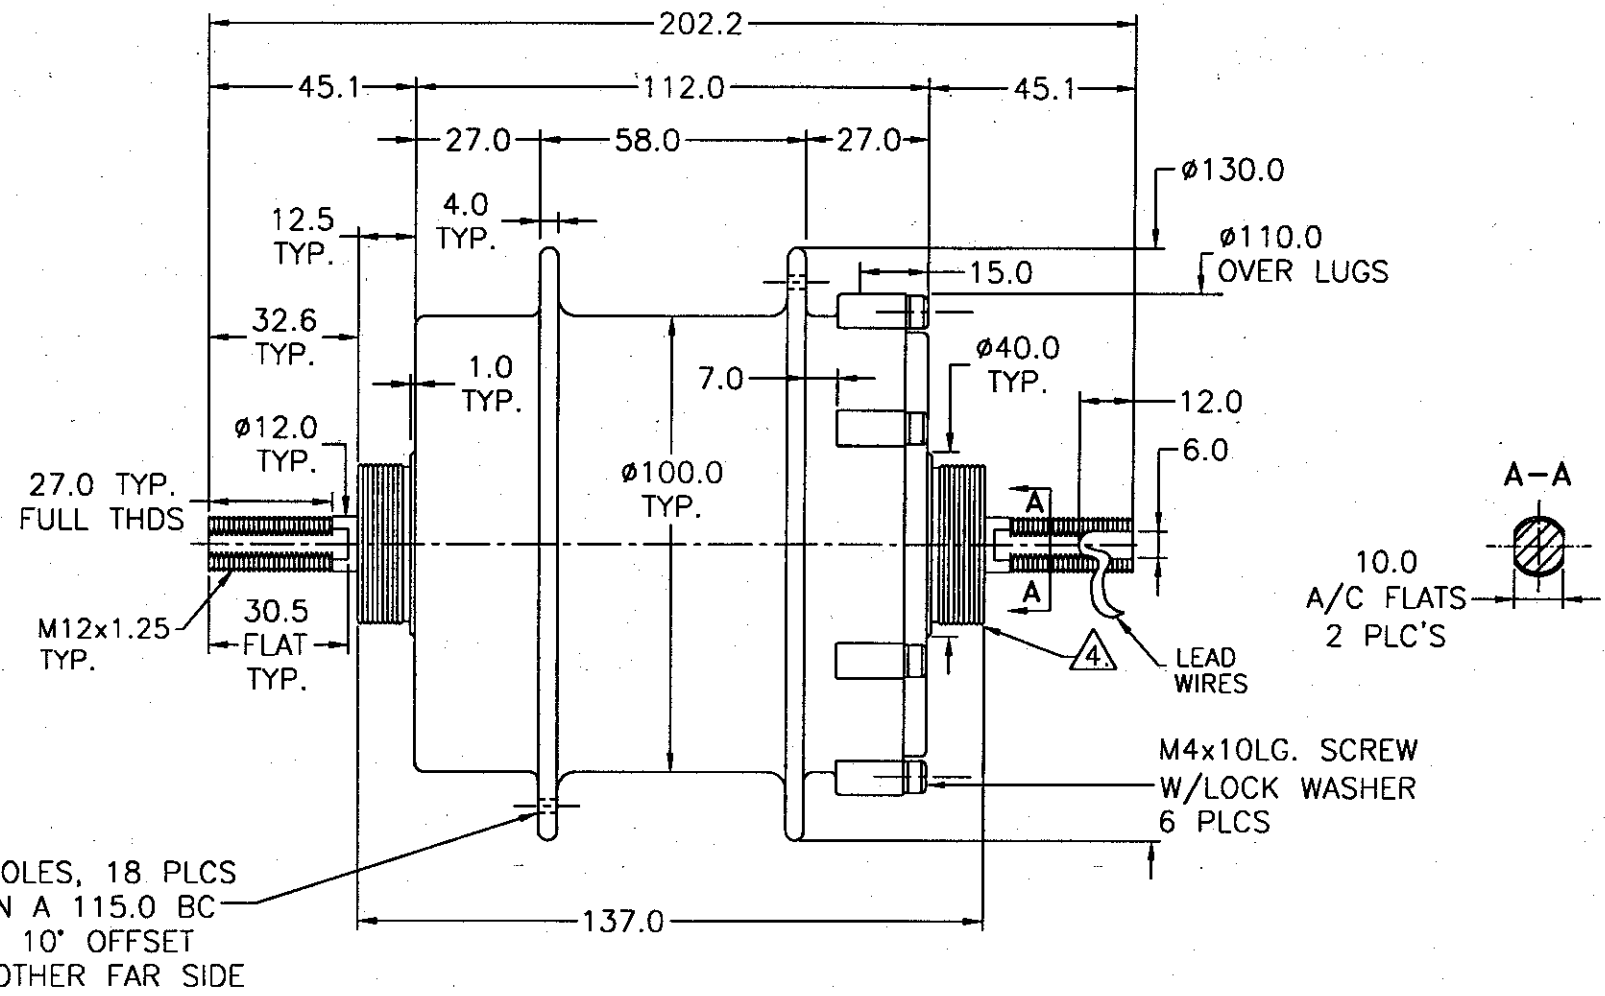

NOTES:

1. ROTATION: COUNTER CLOCKWISE LEAD END
2. DRIVE ELECTRONICS MOUNTED INSIDE THE MOTOR
3. ALL DIMENSIONS ARE IN MM

4

P/N	THREADS
12080–M	M35x1
12080–E	1.375"–24UN

SCALE:–0.6:1

TOLERANCES UNLESS NOTED .0 ±.25 .00 ±.13 (X) REF. DIM.	ANGULARITY CIRCULAR RUNOUT CONCENTRICITY PERPENDICULARITY (X) REFERENCE DIM. ø DIAMETER MATERIAL	DRAWN BY : PARTH CHECKED : SGN DATE: 03 APRIL 2003	BMC BRUSHLESS MOTOR CO. 7625 Hoyenhurst Ave., Suite 34, Van Nuys, CA 91406, USA. HUB MOTOR OUTLINE (100MM) 12080C REV. –