


NOTE: THIS IS CONFIDENTIAL PROPERTY OF BMC. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES WITHOUT OUR WRITTEN CONSENT.

12530

Ø6.50 THRU HOLES,
3 PLACES 120° APART
ON A 114.3 B.C.

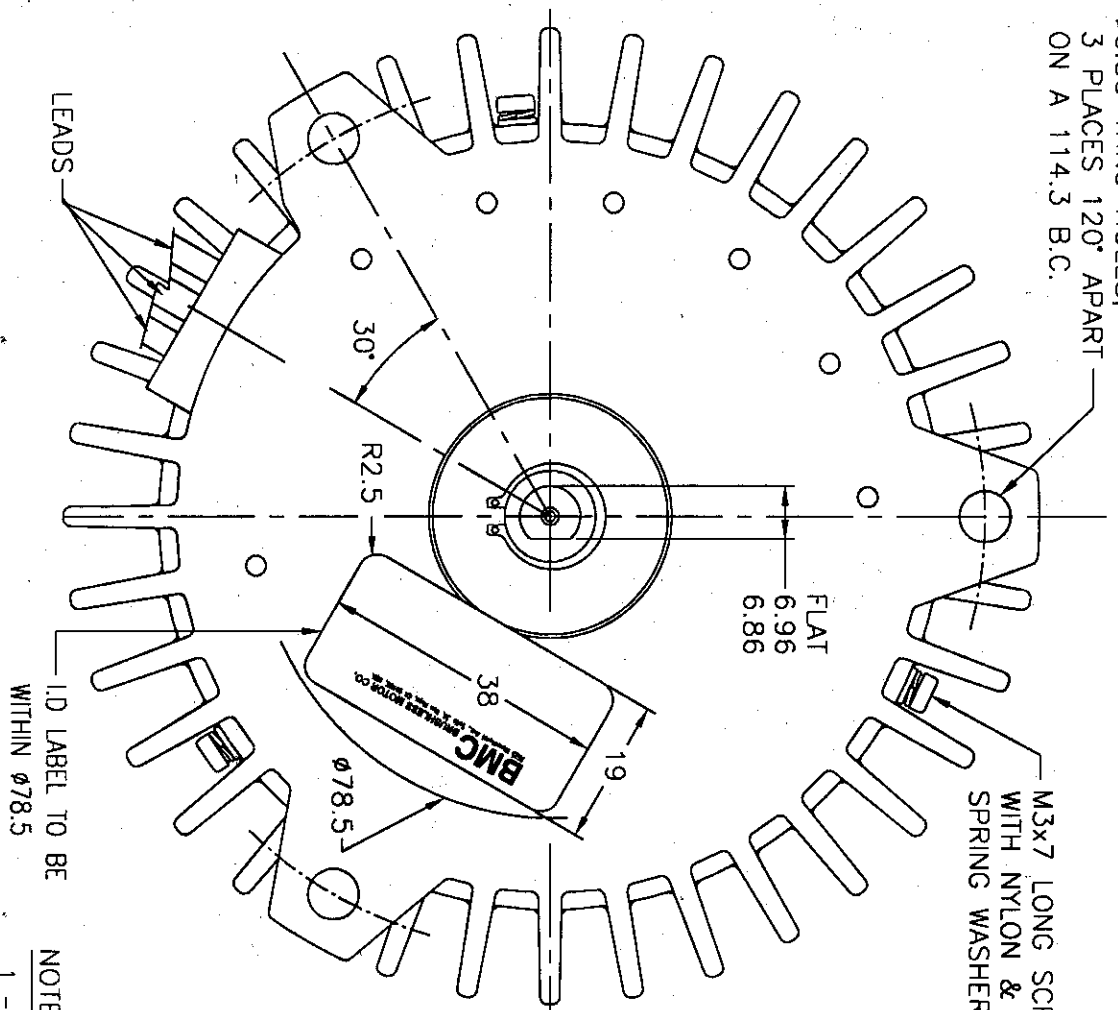


M3x7 LONG SCREW
WITH NYLON &
SPRING WASHER, 3 NOS

I.D LABEL TO BE
WITHIN Ø78.5

NOTE:

- 1 - ALL DIMENSIONS ARE IN MM.
- 2 - DRIVE ELECTRONICS MOUNTED INSIDE THE MOTOR

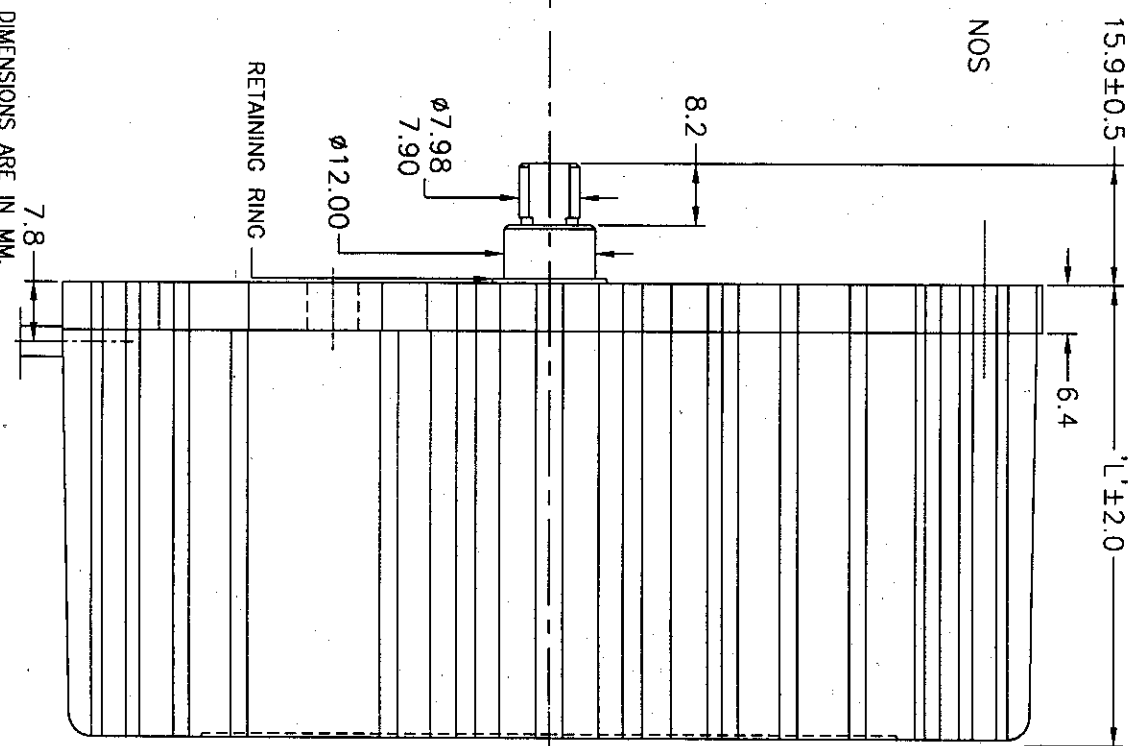

REV.	DATE	BY	ECN	REMARKS	CK

PART NO	'L'	PERFORMANCE SPEC.	DESIGNATION
12530-1	52.7	250 WATTS	HI-MAC 1
-2	61.7	400 WATTS	HI-MAC 2
-3	80.7	600 WATTS	D-MAC

TOLERANCES UNLESS NOTED	ANGULARITY
.0	◊
±.25	◊
±.13	◊
ANGLE ± 2'	◊
(X) REF. DIM.	(X)

DRAWN BY:
PARTH
CHECKED BY:
SGN
DATE:
08 APRIL 2003

BMC BRUSHLESS MOTOR CO.
7625 International Ave., Suite 24, San Diego, CA 92108, USA
MOTOR OUTLINE
36 FRAME
12530C