
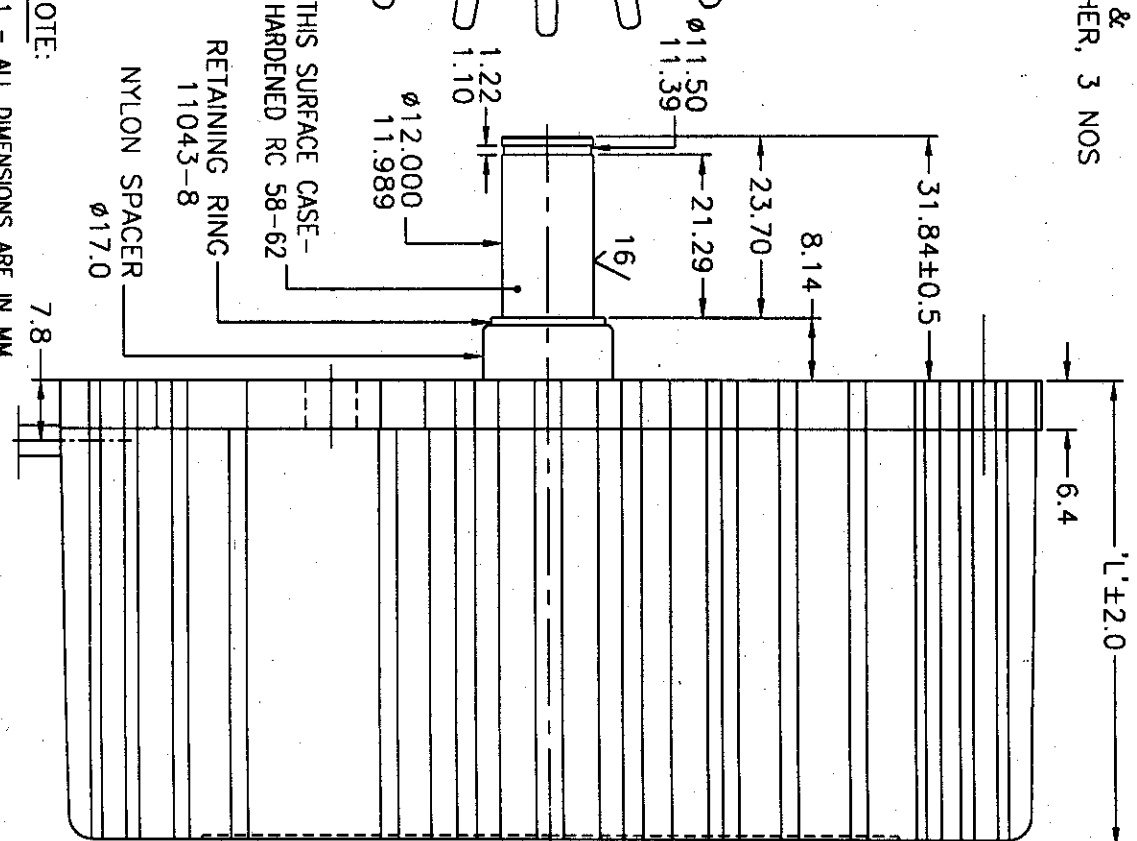


NOTE: THIS IS CONFIDENTIAL PROPERTY OF BMC. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES WITHOUT OUR WRITTEN CONSENT.

PART NO	'L'	PERFORMANCE SPEC.	DESIGNATION
12570-1	52.7	250 WATTS	HI-MAC 1
-2	61.7	400 WATTS	HI-MAC 2
-3	80.7	600 WATTS	D-MAC

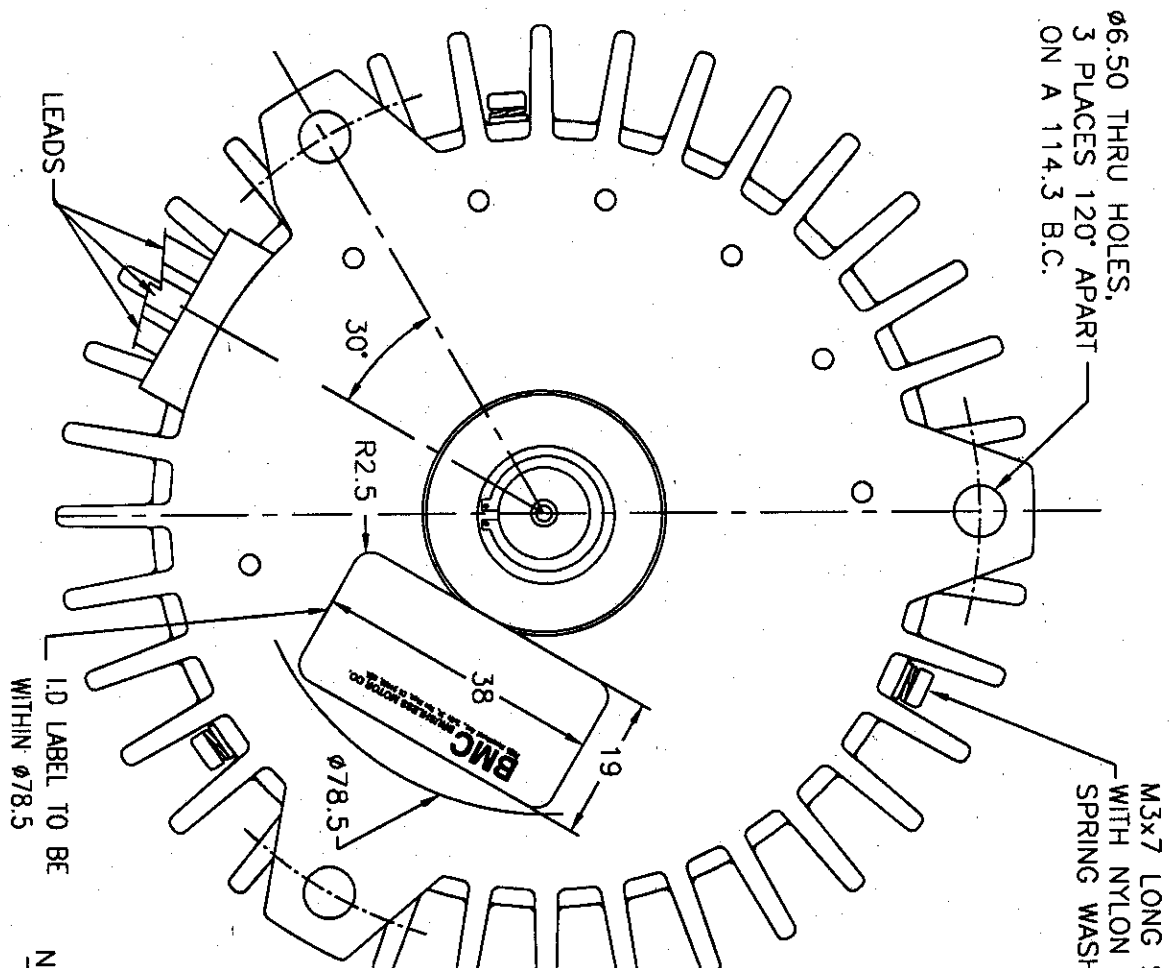

NOTE:

- 1 - ALL DIMENSIONS ARE IN MM
- 2 - DRIVE ELECTRONICS MOUNTED INSIDE THE MOTOR

TOLERANCES UNLESS NOTED	ANGULARITY	DRAWN BY:	BMC BRUSHLESS MOTOR CO.
0 ±.25	CIRCULAR RUNOUT	PARTH	
.00 ±.13	CONCENTRICITY	CHECKED BY:	MOTOR OUTLINE
ANGLE ± 2°	(X) PERPENDICULARITY	SGN	36 FRAME
(X) REF. DIM.	(X) REFERENCE DIM.	DATE:	12570C
	DIA METER	03 APRIL 2003	REV.

REV.	DATE	BY	ECN	REMARKS	CK